

VRV


Roof Cowl



Features

- Can be mounted up to 30° roof pitch
- Durable construction
- Designed for circular flange connections
- Galvanised steel and aluminium
- Optional Colorbond™ colours
- For use where exhaust air velocities are sufficient to prevent rain ingress
- Butterfly dampers fitted with magnetic catches

Drawing

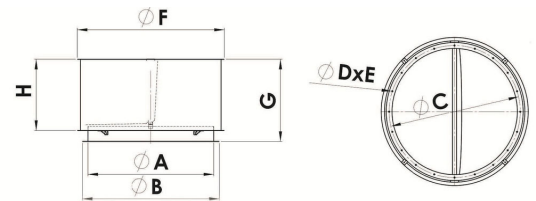

Model	A	B	C	D	E	F	G	H	Weight Kg
VRV400	400	485	450	12	8	640	370	290	19
VRV500	500	585	560	12	12	740	410	330	24
VRV560	560	645	620	12	12	800	440	360	28
VRV630	630	715	690	12	12	870	480	400	32
VRV710	710	795	770	12	16	950	572	440	38
VRV800	800	885	860	12	16	1040	621	500	44
VRV1000	1000	1106	1070	15	16	1240	711	590	59
VRV1120	1120	1240	1190	15	20	1360	771	650	70
VRV1250	1250	1370	1320	15	20	1490	846	725	84
VRV1400	1400	1540	1470	15	20	1640	880	800	100
VRV1500	1500	1640	1570	15	20	1760	982	850	112

Performance Curves

